

SNR 27



The PRO26 custom hearing protector is designated for use in very high noise environments where an even level of protection is required.


The PRO26 provides excellent attenuation across the whole frequency range and for a high SNR protector gives a fairly flat response, giving the user the most natural sounding protection possible whilst protecting from the high noise levels.

Pro-26 will provide protection in sound levels of up to 110dB

PRO26 has been tested and certified to meet the European standard for hearing protectors, EN352-2. Full attenuation data and specification table is available below.

Acoustic Specification

Minimum guaranteed damping level (dB)	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	H	M	L	SNR
PRO 26	25.9	25.4	26.6	24.2	26.2	25.5	32.1	25	25	26	27

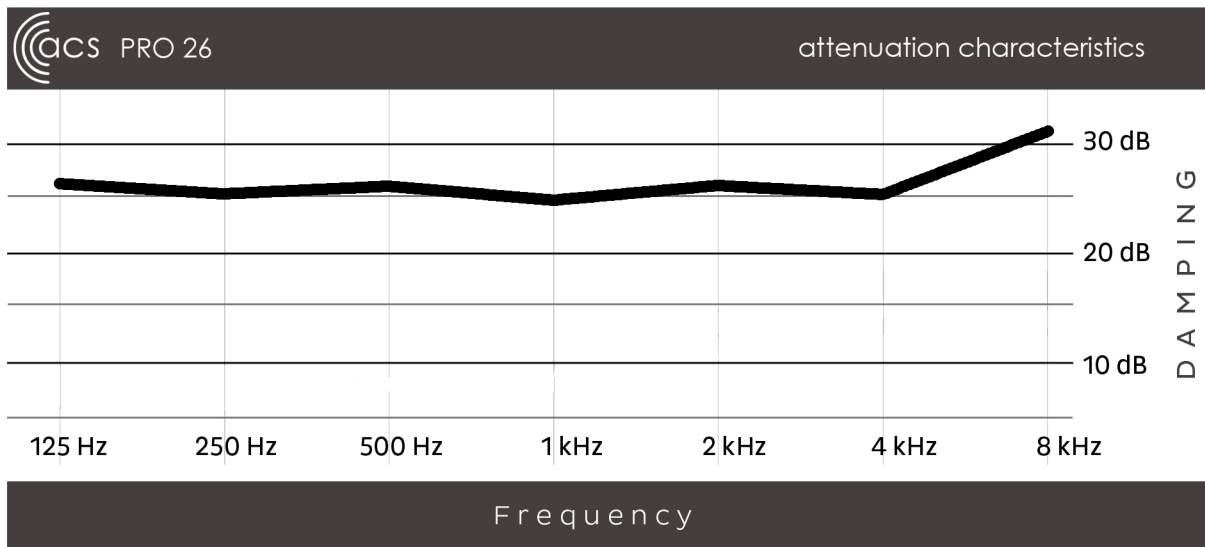

Weight	3g Net 83g Gross Average weight will vary according to ear size	
Build Material	40 Shore Medical Grade Silicone	
Mould Type	Canal Mould	
Standard Colour	Clear	
Included Accessories	Instruction Leaflet, Wax Pick, Comfort Cream, Carry case	
Optional Accessories	Neck cord, Grips	
Package Dimensions	100mm x 55mm x 38mm	
Warranty Period	1 Year against manufacturing and component failure	
Tested to conform to EU Noise at Work Standard EN352-2		
Attenuation Determined by BSI Product Services (0086), Maylands Avenue		
Hemel Hempstead, Herts, HP2 4SQ		

