

SNR 27



The PRO27 custom hearing protector is designed for use in very high noise environments where additional protection is required in the high frequencies.


The PRO27 provides even attenuation across the low and mid frequencies ramping up quickly in the mid-high frequencies to protect the user from the most harmful frequencies.

PRO-27 will provide protection in noise levels of up to 112dB

PRO27 has been tested and certified to meet the European standard for hearing protectors, EN352-2. Full attenuation data and specification table is available below.

Acoustic Specification

Minimum guaranteed damping level (dB)	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	H	M	L	SNR
PRO 27	22	22	23	23	25	32	34	27	24	23	27

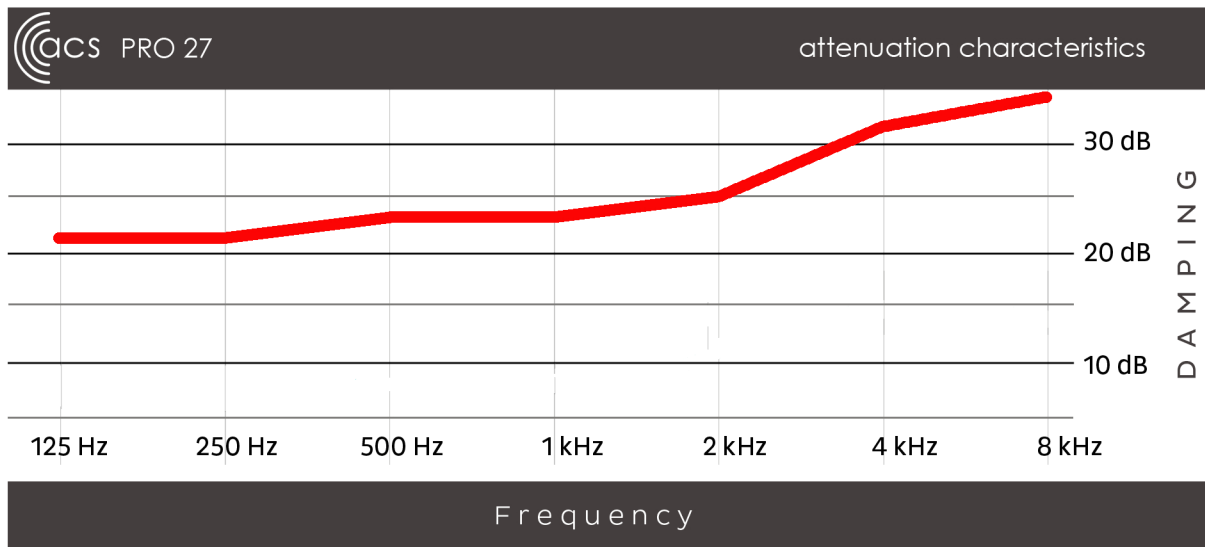

Weight	3g Net 83g Gross Average weight will vary according to ear size
Build Material	40 Shore Medical Grade Silicone
Mould Type	Canal Mould
Standard Colour	Clear
Included Accessories	Instruction Leaflet, Wax Pick, Comfort Cream, Carry case
Optional Accessories	Neck cord, Grips
Package Dimensions	100mm x 55mm x 38mm
Warranty Period	1 Year against manufacturing and component failure
Tested to conform to EU Noise at Work Standard EN352-2	
Attenuation Determined by BSI Product Services (0086), Maylands Avenue	
Hemel Hempstead, Herts, HP2 4SQ	

